



EASY TOUCH 2

User friendly and totally programmable 7" ET2
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor:
G-FACTOR 200 for low spin washers



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: AQUABAC
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø 373 mm (for WEN-11/14)
and Ø 460 mm (for WEN-18)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors,
electronic devices, gear
Technical menu: traceability, error diagnosis



OTHERS


Grey skinplate body
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control.
CE and WRAS approved product. Option ETL



OPTIONS

- Double drain
- External double drain 3" (recommended for WEN-11/14)
- Normally closed valve
- AQUA FLOW: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- Danube Online communication
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- SLUICE: model with 8mm drum holes
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz
No neutral
- Coin / token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	WEN-11 ET2	WEN-14 ET2	WEN-18 ET2			
DRUM							
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18			
Volume	l	100	130	180			
Diameter	mm	620	620	700			
Depth	mm	330	430	470			
GENERAL DETAILS							
Washing speed/ Spinning speed	r.p.m.	53/759	53/759	50/714			
Factor G	-	200	200	200			
Maximum force transmitted	KN	2,0 ±3	2,31 ±4	2,63 ±5			
Frequency-dynamic force	Hz	8,93	8,93	8,42			
Noise level	dB	<70	<70	<70			
Coin laundry version	-	Yes	Yes	Yes			
Double drain	-	Opt (external)	Opt (external)	Opt			
Weighing system / Tilting system	-	No/No	No/No	No/No			
SLUICE - Option 8mm holes drum	-	Yes	Yes	Yes			
DOOR							
Height door center/ Height door base	mm	570/310	570/310	655/348			
Diameter	mm	373	373	460			
POWER							
Motor	kW	1,1	1,1	2,2			
Electric heating power	kW	6	9	12			
Total electric power (electric model)	kW	6,25	9,5	12,75			
Total electric power (hw, steammodel)	kW	1,1	1,1	2,2			
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tensión 230V- I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A
Tensión 230V- III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-
Tensión 400V- III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-
Steam inlet (Steam model)	inch	1/2"		1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5		12	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4		2-4	
Maximum water consumption*	Lit/h	61,5		78,8		120	
Drain	inch	3"		3"		3"	
Drainage capacity	Lit/min	200		200		200	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	mm	719/800		719/800		788/840	
Net Depth / Gross Depth	mm	684/990		830/990		840/1.010	
Net Height / Gross Height	mm	1.158/1.350		1.158/1.350		1.307/1.500	
Net weight / Gross weight	kg	217/225		239/247		281/301	
Volume	m3	1,07		1,07		1,3	

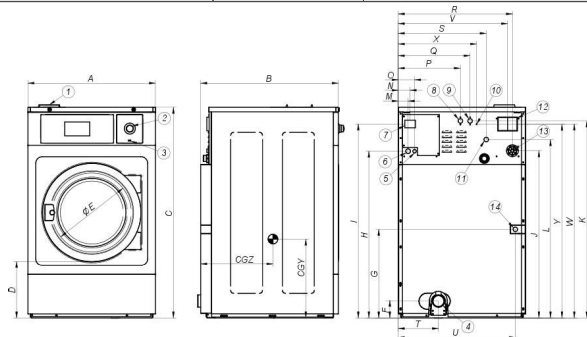

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

* N°20 Program, 75% load

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEN-11	719	684	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.073	424	1.118	383	511
WEN-14	719	830	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.073	424	1.118	484	524
WEN-18	788	840	1.307	348	460	108	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.203	485	1.202	479	546