


LEO

SHIRT FINISHER

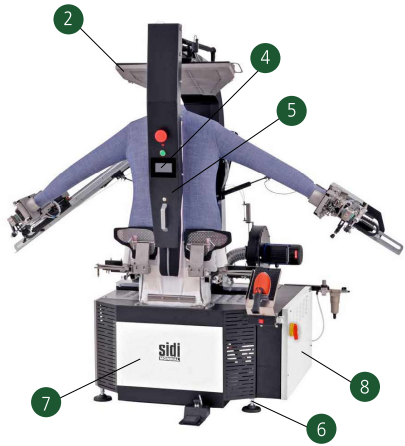

Tensioning Blowing shirt finisher

- Solid and compact structure with integrated blowing and vacuum motor in the machine's frame

- Silicon padded counter paddle to avoid shines on dark fabrics and marks on the buttons

- Height adjustable with positioning of the neck holder from a minimum of 157 cm to a maximum of 168 cm (62" - 66")

- Lateral flexible expanders

- Short sleeve device as standard

- Easy-to-dress dummy for a fast positioning of the shirt

- Rounded and rotating cuff clamps with manual height adjustment

- Available in a **total electric version**

TECHNICAL DATA

	PEGASUS PRO	
Required power	400V/3+N/50Hz (ALUX 24 VDC)	230V/3/60Hz (ALUX 24 VDC)
Fan motor	1,5 kW	3,0 hp
Vacuum motor	0,4 kW	0,5 hp
Power absorption	1,5 kW	2,0 hp
Electric current absorption	4,0 amp	8,0 amp
Air inlet	1/2"	1/2"
Air working pressure	5,5 bar (0,6 Mpa)	80 psi
Compressed air	57 Nl/cycle	2,0 ft ³ /cycle
Steam inlet	1/2"	1/2"
Steam working pressure	5,0+7,0 bar (0,5+0,7 Mpa)	72+100 psi
Steam consumption	24 + 27 kg/h	53 + 60 lb/h
Return outlet	2 x 1/2"	2 x 1/2"
Package dimensions (LxWxH)	205 x 126 x 198 cm	81 x 50 x 78 in
Net weight	675 Kg	1488 lbs
Gross weight - inpackage	775 Kg	1710 lbs
Package volume	5,1 m ³	180 ft ³
Max volume in function (LxW)	226 x 127 cm	89 x 50 in

*Other voltages by request.

	VEGA	
Required power	400V/3 + N/50Hz (ALUX 24 VDC)	230V/3/60Hz (ALUX 24 VDC)
Fan motor	1,5 kW	3,0 hp
Vacuum motor	0,4 kW	0,5 hp
Rotation motor	0,3 kW	0,2 hp
Power absorption	1,9 kW	2,5 hp
Electric current absorption	6,0 amp	10 amp
Air inlet	1/2"	1/2"
Air working pressure	7,0 bar (0,7 Mpa)	100 psi
Compressed air	125 Nl/cycle	4,4 ft ³ /cycle
Steam inlet	1/2"	1/2"
Steam working pressure	5,0+7,0 bar (0,5+0,7 Mpa)	72+100psi
Steam consumption	55 kg/h	121 lb/h
Return outlet	2 x 1/2"	2 x 1/2"
Package dimensions (LxWxH)	228 x 162 x 210 cm	90 x 64 x 83 in
Net weight	1,163 Kg	2,564 lbs
Gross weight - inpackage	1,293 Kg	2,851 lbs
Package volume	7,8 m ³	275 ft ³
Max volume in function (LxW)	231 x 231 cm	91 x 91 in

*Other voltages by request.

	MAGIC PRO - STEAM		MAGIC PRO - ELECTRIC	
Required power	400V/3 + N/50Hz (ALUX 24 VDC)	230V/3/60Hz (ALUX 24 VDC)	400V/3 + N/50Hz (ALUX 24 VDC)	230V/3/60Hz (ALUX 24 VDC)
Fan motor	1,5 kW	3,0 hp	1,5 kW	3,0 hp
Vacuum motor	0,4 kW	0,5 hp	0,4 kW	0,5 hp
Power absorption	1,5 kW	3,0 hp	25 kW	33 hp
Power absorption - Economy	--	--	18 Kw	24 hp
Electric current absorption	4,0 amp	10 amp	40 amp	63 amp
Air inlet	1/4"	1/4"	1/4"	1/4"
Air working pressure	7,0 bar (0,7 Mpa)	100 psi	7,0 bar (0,7 Mpa)	100 psi
Compressed air	40Nl/cycle	1,4 ft ³ /cycle	40Nl/cycle	1,4 ft ³ /cycle
Steam inlet	1/2"	1/2"	--	--
Steam working pressure	5,0+7,0 bar (0,5+0,7 Mpa)	72 + 100 psi	--	--
Steam consumption	25 + 35 kg/h	55 + 77 lb/h	--	--
Return outlet	1/2"	1/2"	--	--
Package dimensions (LxWxH)	205 x 126 x 198 cm	81 x 50 x 78 in	205 x 126 x 198 cm	81 x 50 x 78 in
Net weight	440 Kg	970 lbs	440 Kg	970 lbs
Gross weight - inpackage	475 Kg	1050 lbs	475 Kg	1050 lbs
Package volume	5,1 m ³	180 ft ³	5,1 m ³	180 ft ³
Max volume in function (LxW)	215 x 116 cm	85 x 46 in	215 x 116 cm	85 x 46 in

*Other voltages by request.

	LEO - STEAM		LEO - ELECTRIC	
Required power	400V/3 + N/50Hz (ALUX 24 VDC)	230V/3/60Hz (ALUX 24 VDC)	400V/3 + N/50Hz (ALUX 24 VDC)	230V/3/60Hz (ALUX 24 VDC)
Fan motor	1,5 kW	3,0 hp	1,5 kW	3,0 hp
Vacuum motor	0,3 kW	0,4 hp	0,3 kW	0,4 hp
Power absorption	1,5 kW	3,0 hp	17 kW	23 hp
Power absorption - Economy	--	--	10 kW	14 hp
Electric current absorption	4,0 amp	10 amp	32 amp	53 amp
Air inlet	1/4"	1/4"	1/4"	1/4"
Air working pressure	7,0 bar (0,7 Mpa)	100 psi	7,0 bar (0,7 Mpa)	100 psi
Compressed air	15 Nl/cycle	0,6 ft ³ /cycle	15 Nl/cycle	0,6 ft ³ /cycle
Steam inlet	1/2"	1/2"	--	--
Steam working pressure	5,0+7,0 bar (0,5+0,7 Mpa)	72 + 100psi	--	--
Steam consumption	15 + 20 kg/h	33 + 44 lb/h	--	--
Return outlet	1/2"	1/2"	--	--
Package dimensions (LxWxH)	230 x 126 x 198 cm	90 x 50 x 78 in	230 x 126 x 198 cm	90 x 50 x 78 in
Net weight	350 Kg	770 lbs	350 Kg	770 lbs
Gross weight - inpackage	400 Kg	880 lbs	400 Kg	880 lbs
Package volume	5,7 m ³	203 ft ³	5,7 m ³	203 ft ³
Max volume in function (LxW)	240 x 127 cm	95 x 50 in	240 x 127 cm	95 x 50 in

*Other voltages by request.

sidi
MONDIAL
SIDIMONDIAL.COM

THE BEST TECHNOLOGY FOR YOUR SHIRTS

High productivity and high performances

02/2020

sidi
MONDIAL

SIDI MONDIAL SRL
Via G. Di Vittorio 6 | 20065 INZAGO (MI) | Italy | tel. +390295383901 | fax. +390295383903
infosidi@sidi mondial.com | www.sidi mondial.com